


Compressible single-use packers



Insert the packer and expand the rubber sleeve in the hole either manually (as in the picture) or mechanically (with a wrench or nut-runner)

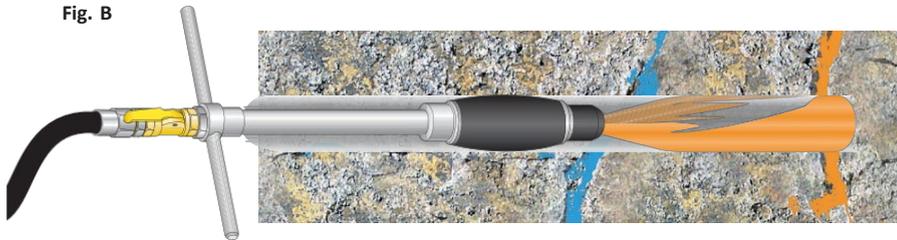

Pump grout through the packer. Release the pressure when the stop criteria have been met. The check valve on the front of the packer will keep the grout in the borehole.




After grouting, remove the grout pipe for cleaning and reuse.

The packer is left in the borehole.


Compressible reusable packers



Insert the packer and expand the rubber sleeve in the hole either manually (as in the picture) or mechanically (with a wrench or nut-runner).

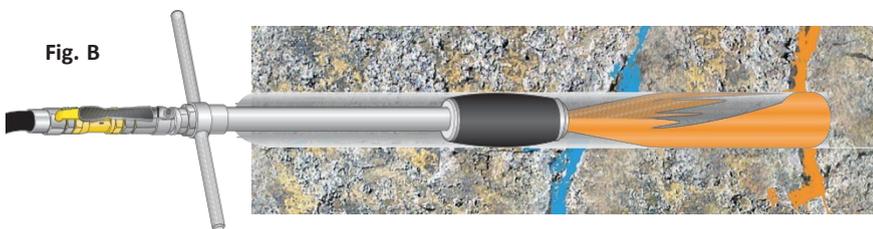

Pump the grout through the packer, when the stop criteria is reached, close the valve.

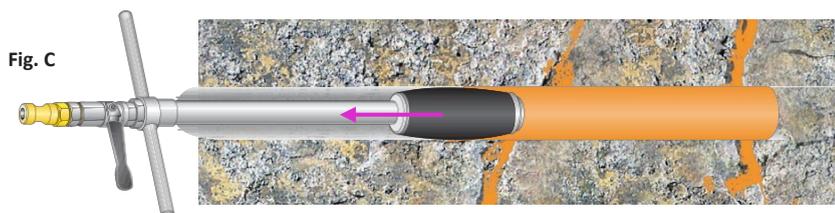

Once the grout has stabilized/hardened, remove the tube **and** packer for cleaning and reuse.